


Spannschloss DIN 1480 galvanisch verzinkt mit Anschweißenden (roh)

Material: Stahl S235JR (ehem. St37), galvanisch verzinkt

Ausführung: Gesenkgeschmiedet, metrisches Gewinde

Norm: DIN 1480

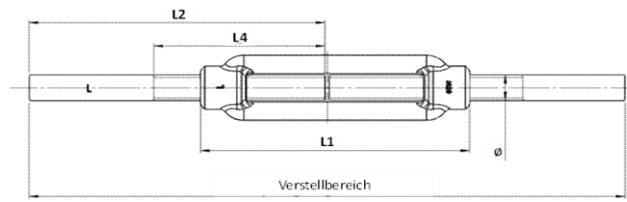

Beispielhaftes Modell

Artikelnummer	Ø	L1 (mm)	L2 (mm)	L4 (mm)	Spannweg	Verstellbereich
SSAE0806	M6	110,0	120,0	65,0	86,0	240-326
SSAE0808	M8	110,0	120,0	65,0	80,0	240-320
SSAE0810	M10	125,0	150,0	75,0	89,0	300-389
SSAE0812	M12	125,0	150,0	75,0	83,0	300-383
SSAE0814	M14	140,0	165,0	85,0	90,0	330-420
SSAE0816	M16	170,0	200,0	100,0	116,0	400-516
SSAE0820	M20	200,0	220,0	120,0	132,0	440-572
SSAE0822	M22	220,0	220,0	130,0	146,0	440-586
SSAE0824	M24	255,0	260,0	150,0	177,0	520-697
SSAE0827	M27	255,0	260,0	150,0	165,0	520-685
SSAE0830	M30	255,0	260,0	160,0	165,0	520-685
SSAE0836	M36	295,0	300,0	180,0	185,0	600-785
SSAE0842	M42	330,0	350,0	200,0	204,0	700-904
SSAE0848	M48	355,0	380,0	220,0	199,0	760-959

Die Angaben können je Artikel leichte Abweichungen enthalten.



06028 - 40 625 62 | Klement.J@t-online.de

www.klement-hydraulik.de